



26、全承三通  
All socket tee



Main			Branch			Weight (kg)	
DN	e	LU	dn	e1	Lu'	T type	K type
80	8.1	170	80	8.1	85	12.4	17.7
100	8.4	170	80	8.1	95	14.8	21.5
		190	100	8.4	95	16.1	23.2
125	8.7	170	80	8.1	105	17.6	22.8
		195	100	8.4	110	19.0	24.8
		225	125	8.7	110	22.0	26.9
150	9.1	170	80	8.1	120	21.5	29.2
		195	100	8.4	120	23.5	31.0
		230	125	8.7	125	25.8	33.3
		255	150	9.1	125	28.0	35.6
200	9.8	175	80	8.1	145	30.0	37.9
		200	100	8.4	145	32.0	38.0
		230	125	8.7	145	34.5	41.4
		255	150	9.1	150	37.0	44.0
250	10.5	315	200	9.8	155	48.0	49.6
		180	80	8.1	170	40.2	43.0
		200	100	8.4	170	42.8	47.9
		230	125	8.7	175	46.0	49.1
		260	150	9.1	175	51.1	56.4
300	11.2	375	250	10.5	190	64.1	67.4
		190	80	8.1	195	59.4	65.4
		205	100	8.4	195	61.1	67.7
		240	125	8.7	200	65.2	71.7
		260	150	9.1	200	67.2	77.6
		320	200	9.8	205	75.5	82.9
		375	250	10.5	210	84.1	92.1
350	11.9	435	300	11.2	220	97.6	104.5
		180	80	8.1	220	63.6	74.5
		200	100	8.4	220	67.2	80.0
		240	125	8.7	225	71.7	83.6
		250	150	9.1	225	79.6	92.6
		300	200	9.8	230	84.9	97.5
		360	250	10.5	235	96.9	109.0
400	12.6	420	300	11.2	240	106.0	122.0
		495	350	11.9	250	116.0	131.0
		190	80	8.1	240	76.1	87.1
		210	100	8.4	245	82.2	95.0
		240	125	8.7	250	89.5	102.5
		270	150	9.1	250	96.7	110.0
		330	200	9.8	255	102.0	115.0
		380	250	10.5	260	116.0	128.0
450	13.3	440	300	11.2	270	126.0	142.0
		500	350	11.9	270	137.0	152.0
		560	400	12.6	280	150.0	166.0
		190	80	8.1	270	101.0	102.5
		210	100	8.4	270	106.0	116.0
		240	125	8.7	270	111.0	121.0
		270	150	9.1	280	116.0	126.0
		330	200	9.8	280	127.0	137.0
		390	250	10.5	290	138.0	147.0
		445	300	11.2	290	149.0	163.0
450	13.3	500	350	11.9	300	161.0	175.0
		560	400	12.6	300	173.0	186.0
		620	450	13.3	310	186.0	198.0


26、全承三通

All socket tee




Main		Branch			Weight (kg)		
DN	e	LU	dn	e1	Lu'	T type	K type
500	14	190	80	8.1	290	110.0	116.8
		220	100	8.4	295	115.0	123.0
		245	125	8.7	300	126.0	134.0
		270	150	9.1	300	137.0	145.0
		330	200	9.8	310	141.0	149.0
		390	250	10.5	310	161.0	168.0
		450	300	11.2	320	174.0	185.0
		510	350	11.9	320	187.0	198.0
		560	400	12.6	330	199.0	210.0
		620	450	13.3	335	214.0	224.0
		680	500	14.0	340	234.0	242.0
600	15.4	200	80	8.1	340	165.0	165.0
		220	100	8.4	345	169.0	160.0
		250	125	8.7	350	177.0	176.0
		280	150	9.1	350	185.0	184.0
		340	200	9.8	360	188.0	187.0
		400	250	10.5	360	215.0	213.0
		450	300	11.2	370	231.0	233.0
		510	350	11.9	370	246.0	248.0
		570	400	12.6	380	258.0	260.0
		630	450	13.3	385	280.0	281.0
		690	500	14.0	390	296.0	296.0
700	16.8	800	600	15.4	400	343.0	338.0
		205	80	8.1	390	217.0	207.0
		230	100	8.4	400	224.0	215.0
		260	125	8.7	400	232.5	223.5
		290	150	9.1	400	241.0	232.0
		340	200	9.8	410	259.0	250.0
		400	250	10.5	410	277.0	267.0
		460	300	11.2	420	297.0	290.0
		520	350	11.9	420	317.0	310.0
		580	400	12.6	430	337.0	329.0
		630	450	13.3	435	361.0	350.0
700	500	14.0	440	380.0	370.0		
800	18.2	810	600	15.4	450	430.0	416.0
		920	700	16.8	460	486.0	470.0
		210	80	8.1	440	278.0	254.0
		230	100	8.4	445	287.0	264.0
		260	125	8.7	450	297.0	274.0
		290	150	9.1	450	307.0	284.0
		350	200	9.8	460	330.0	305.0
		410	250	10.5	460	352.0	328.0
		470	300	11.2	470	374.0	353.0
		520	350	11.9	470	398.0	376.0
		580	400	12.6	480	420.0	398.0
640	450	13.3	485	448.0	422.0		
700	500	14.0	490	472.0	447.0		
810	600	15.4	500	526.0	497.0		
930	700	16.8	510	586.0	556.0		
1045	800	18.2	520	655.0	618.0		
900	19.6	220	80	8.1	490	349.0	322.0
		240	100	8.4	500	360.0	333.0
		270	125	8.7	500	373.0	346.0
		300	150	9.1	500	386.0	359.0
		360	200	9.8	510	410.0	382.0
		410	250	10.5	510	437.0	408.0

**26、全承三通**  
**All socket tee**




Main		Branch			Weight (kg)		
DN	e	LU	dn	e1	Lu'	T type	K type
900	19.6	470	300	11.2	520	462.0	438.0
		530	350	11.9	520	490.0	464.0
		590	400	12.6	530	518.0	491.0
		650	450	13.3	535	547.0	518.0
		700	500	14.0	540	574.0	546.0
		820	600	15.4	550	635.0	602.0
		940	700	16.8	560	700.0	667.0
		1050	800	18.2	570	774.0	733.0
		1170	900	19.6	580	858.0	815.0
1000	21	220	80	8.1	540	433.0	434.0
		250	100	8.4	550	443.0	445.0
		275	125	8.7	550	459.0	460.0
		300	150	9.1	550	474.0	475.0
		360	200	9.8	560	502.0	503.0
		420	250	10.5	560	533.0	533.0
		480	300	11.2	570	564.0	568.0
		540	350	11.9	570	594.0	597.0
		590	400	12.6	580	626.0	628.0
		650	450	13.3	585	659.0	658.0
		710	500	14.0	590	690.0	690.0
		830	600	15.4	600	758.0	754.0
		940	700	16.8	610	831.0	825.0
		1060	800	18.2	620	913.0	901.0
		1170	900	19.6	630	1000	985.0
1290	1000	21.0	645	1096	1096		
1100	22.4	230	80	8.1	590	524.1	452.7
		250	100	8.4	600	535.8	465.0
		280	125	8.7	600	553.3	482.4
		310	150	9.1	600	570.1	499.8
		370	200	9.8	610	605.9	534.6
		430	250	10.5	610	641.4	569.3
		480	300	11.2	620	675.3	604.8
		540	350	11.9	620	706.7	638.9
1100	22.4	600	400	12.6	630	741.0	674.5
		660	450	13.3	635	775.1	711.3
		720	500	14.0	640	812.5	747.3
		830	600	15.4	650	881.9	815.4
		950	700	16.8	660	972.2	894.9
		1060	800	18.2	670	1057	970.1
		1180	900	19.6	680	1154	1062
		1300	1000	21.0	695	1260	1166
1200	23 J	235	80	8.1	540	641	530.3
		260	100	8.4	650	657.5	547.6
		290	125	8.7	650	677.6	567.5
		320	150	9.1	650	697.1	587.6
		370	200	9.8	660	731.4	620.9
		430	250	10.5	660	772.0	660.7
		490	300	11.2	670	816.6	706.9
		550	350	11.9	670	853.0	746.0
		610	400	12.6	680	892.3	786.6
		660	450	13.3	685	929.0	821.7
		720	500	14.0	690	966.9	862.5
		840	600	15.4	700	1054	945.6
		950	700	16.5	710	1145	1028
		1070	800	18.2	720	1243	1118

26、全承三通  
All socket tee



Main		Branch			Weight (kg)		
DN	e	LU	dn	e1	Lu'	T type	K type
1200	23.1	1190	900	19.6	730	1348	1217
		1300	1000	21.0	745	1455	1322
		1530	1200	23.8	770	1713	1545
1400	26.6	250	80	8.1	740	988.8	698.0
		270	100	8.4	750	1006	715.9
		300	125	8.7	750	1032	741.7
		330	150	9.1	750	1058	767.5
		390	200	9.8	760	1110	818.8
		440	250	10.5	760	1153	861.5
		500	300	11.2	770	1209	918.9
		560	350	11.9	770	1257	969.1
		620	400	12.6	780	1307	1021
		680	450	13.3	785	1357	1074
		730	500	14.0	790	1402	1117
		850	600	15.4	800	1507	1221
		970	700	16.8	810	1627	1330
		1080	800	18.2	820	1737	1431
		1200	900	19.6	830	1861	1550
		1310	1000	21.0	845	1984	1670
		1430	1100	22.4	860	2126	1797
		1550	1200	23.8	870	2279	1930
1780	1400	26.6	890	2648	2210		
1600	29.4	400	200	9.8	860	2551	1122
		460	250	10.5	860	1616	1186
		510	300	11.2	870	1674	1246
		630	400	12.6	880	1797	1373
		770	500	14.0	890	1946	1523
		860	600	15.4	900	2044	1620
		1090	800	18.2	920	2318	1875
		1330	1000	21.0	945	2618	2167
		1560	1200	23.8	970	2942	2456
		1790	1400	26.6	990	3341	2765
		2020	1600	29.4	1010	3800	3155
1800	32.2	410	200	9.5	960	1897	1449
		470	250	10.5	960	1980	1531
		530	300	11.2	970	2063	1616
		640	400	12.6	980	2208	1765
		760	500	14.0	990	2353	1911
		870	600	15.4	1000	2526	2083
		1110	800	18.2	1020	2835	2373
		1340	1000	21.0	1045	3173	2703
		1570	1200	23.8	1070	3543	3037
		1800	1400	26.6	1090	3983	3387
		2030	1600	29.4	1110	4473	3809
		2270	1800	32.2	1130	4958	4285
2000	35	420	200	9.8	1060	/	1924
		480	250	10.5	1060	/	2020
		540	300	11.2	1070	/	2117
		650	400	12.6	1080	/	2205
		770	500	14.0	1090	/	2479
		890	600	15.4	1100	/	2660
		1120	800	18.2	1120	/	3035
		1350	1000	21.0	1145	/	3437
		1580	1200	23.8	1170	/	3846
		1810	1400	26.6	1190	/	4244
2050	1600	29.4	1210	/	4695		

26、全承三通  
All socket tee

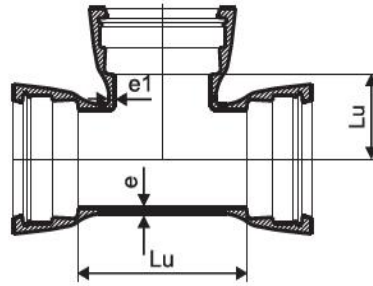

Main		Branch			Weight (kg)		
DN	e	LU	dn	e1	Lu'	T type	K type
		2280	1800	32.2	1230	/	5218
		2510	2000	35.0	1255	/	5787
2200	37.8	430	200	9.8	1160	/	2252
		490	250	10.5	1160	/	2369
		550	300	11.2	1170	/	2487
		670	400	12.6	1180	/	2717
		780	500	14.0	1190	/	2906
		900	600	15.4	1200	/	3126
		1130	800	18.2	1220	/	3552
		1360	1000	21.0	1245	/	3998
		1590	1200	23.8	1270	/	4453
		1830	1400	26.6	1290	/	4916
		2060	1600	29.4	1310	/	5433
		2290	1800	32.2	1330	/	5974
		2520	2000	35.0	1355	/	6573
		2750	2200	37.8	1380	/	7230
		2400	40.6	450	200	9.8	1260
500	250			10.5	1260	/	3073
560	300			11.2	1270	/	3210
680	400			12.6	1280	/	3478
790	500			14.0	1290	/	3700
910	600			15.4	1300	/	3957
1140	800			18.2	1320	/	4452
1370	1000			21.0	1345	/	4965
1610	1200			23.8	1370	/	5497
1840	1400			26.6	1390	/	6013
2070	1600			29.4	1410	/	6589
2300	1800			32.2	1430	/	7185
2530	2000			35.0	1455	/	7832
2770	2200			37.8	1480	/	8558
3000	2400			40.6	1500	/	9428
2600	43.4	460	200	9.8	1360	/	3551
		520	250	10.5	1360	/	3708
		570	300	11.2	1370	/	3840
		690	400	12.6	1380	/	4149
		810	500	14.0	1390	/	4432
		920	600	15.4	1400	/	4704
		1150	800	18.2	1420	/	5273
		1390	1000	21.0	1445	/	5885
		1620	1200	23.8	1470	/	6466
		1850	1400	26.6	1490	/	7051
		2080	1600	29.4	1510	/	7692
		2310	1800	32.2	1530	/	8351
		2545	2000	35.0	1555	/	9081
		2780	2200	37.8	1580	/	9835
		3010	2400	40.6	1600	/	10743
3240	2600	43.4	1620	/	11545		